



HEATING, VENTILATION & EXTRACTION GUIDE

CONTENTS:

Important Message about Heat and Ventilation	3	Airbus 200 Complete Unit	37
Benefits of Heat	4	Airbus 250 Complete Unit	38
Bathroom Heater Selection Guide	5	Airbus 300 Complete Unit	39
Ventair Bathroom Heating		Airbus 200 Motor & Fascia	40-41
Sahara 4-in-1	6-7	Airbus 225/250 Motor & Fascia	42-43
Sahara 2-in-1	8	Mixflow & Inline Fans	44-45
Airbus 3-in-1	9	Air Transfer & Shower Light Kit	46
Madrid 3-in-1	10-11	All Purpose Wall/Ceiling Exhaust Fan	47
Sunset	12	Slimline Exhaust Fan	48
Brook 2 & 4	13	Auto Shutter Wall Fan & Universal Exhaust Fan	49
Myka 2 & 4	14	Olson & Ovation Exhaust Fan	50
Klein 2 & 4	15	Ultraflo & Gyro Exhaust Fan	51
Manrose Bathroom Heating		Vent-Axia Healthy Ventilation Range	
Capri 3-in-1	16	Multivent & Kit	52
Rio 3-in-1	17	Fresh Vent	53
Sierra 2	18	PureAir Room 260X	54
Sierra 4	19	Simply Quiet Fan	55
Ventair Outdoor Heating		Svara, PureAir Sense & Through Wall Kit	56-57
Sunburst Mini	20	Manrose Exhaust Fan Range	
Sunburst 3000	21	Low Voltage Exhaust Fans	58
Sunset Outdoor	22	Through Wall Exhaust Fan Kits	59
Heatwave Pro	23	Commercial Wall Exhaust Fans & Kits	60-61
Ventilation		Inline Exhaust Fan & Kits	62
Compliance and the Importance of Ventilation	24-25	Manrose Hand Dryer Range	
Condensation, a Silent Enemy	26-27	Thin Dry Wall Hand Dryer	63
Understanding Airflow	28	Through Roof Products	
Healthy Ventilation Solutions	29	Exhaust Cowl Fans and Kits	64-65
Airbus Quick Selection Guide	30-31	Accessories	
Ventair Exhaust Fan Range		Manrose	66-67
Airbus EC Complete Unit	32-33	Ventair	68-71
Airbus EC Motor & Fascia	34-35		
Airbus 150 Complete Unit	36		



An Important Message about Heat and Ventilation

Ventair is committed to raising awareness around the importance of Heating and Ventilation in the home.

Stricter buildings regulations are driving changes in the Ventilation Industry and Ventair is leading the way with smarter, more effective ventilation solutions.

Controlling Steam and Condensation

Understanding how steam and condensation is formed, is the first step to finding a holistic solution to what is a common, and often underestimated problem. Choosing a quality ventilation product, is a crucial part of the solution.

Turn to Page 26-27 for more information.

HEATING

THE BENEFITS OF HEAT

Feeling warm in the bathroom is not only comfortable, but has other benefits that we don't often consider.

Warming the surfaces such as tiles, mirrors, walls and fixtures will minimise the amount of condensation that occurs while warmer air will also reduce the amount of steam that is produced by hot water.

TWO TYPES OF HEAT

Radiant Heat

creates instant warmth on the skin and surrounding surfaces but takes longer to heat the air. This includes traditional heat globes and the more recent introduction of halogen heat tubes.




Convection/Fan Heat

while still comfortable to stand beneath, it does a much better job in heating the entire bathroom and is very effective in minimising the occurrence of condensation and mould.



Exhaust

Every Ventair bathroom heater comes with an integrated exhaust fan that can clear residual steam within minutes of turning off the shower. Used correctly, and in conjunction with the heating function, an exhaust fan can be extremely effective in keeping condensation and mould at bay.



All Ventair bathroom heaters have a quick reference guide to make selecting the right product easier than ever. It takes into account raw airflow and ducting ability. Adding duct will proportionally reduce the airflow of an exhaust fan. Keep the duct length as short and straight as possible to help maximise the airflow.

For more detailed airflow data and technical specifications, please see the product data sheet at www.ventair.com.au

BATHROOM HEATER SELECTION GUIDE



Klein

Our entry level 3-in-1 that has respectable specifications and is great value for money. Page 15.




Myka

The ultimate all-rounder and one of our most popular 3-in-1 units. Page 14.



Brook

A traditional style 3-in-1 that focuses on higher airflow. Page 13.



Sierra

Modern design Manrose branded 3-in-1 that uses traditional style heat globes. Page 18-19.



Madrid 3-in-1

Stylish ultra slim, energy efficient 3-in-1 with fan heater, LED light and powerful exhaust fan. Page 10-11.



Capri / Rio

Premium Manrose branded 3-in-1's that combine both, looks and performance. Page 16-17.



Airbus 3-in-1

A commercial grade, high performance 3-in-1 that carries the tried and trusted Airbus name. Page 9.



Sahara

Top of the range 4-in-1 incorporating a new fan heat technology, and the very latest in design. Page 6-7.






SAHARA

4-IN-1 BATHROOM UNIT

- Ultra modern, high performance unit with integrated fan, fan heater, LED light and exhaust function
- Fan forced heat creates a comfortable and warm environment
- Cool function ideal for warmer climates
- High air extraction ideal for control of steam and moisture
- Premium LED light panel with high lumen output


Dimensions



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Fan Heat (L/H)	Noise	Light	Lumens	Rec. Min. Install depth	Cut Out Size
SAH31BL	Matte Black	540 x 376mm	55w	380m ³ H	1100/2000w	48db(A)	1 x 20w LED	1500Lm	200mm	523 x 343mm
SAH31WH	White	540 x 376mm	55w	380m ³ H	1100/2000w	48db(A)	1 x 20w LED	1500Lm	200mm	523 x 343mm



**NEW FAN HEAT
TECHNOLOGY**






SAHARA

2-IN-1 BATHROOM UNIT

- Ultra modern, high performance unit with integrated fan, fan heater and exhaust function
- Fan forced heat creates a comfortable and warm environment
- Cool function ideal for warmer climates
- High air extraction ideal for control of steam and moisture


Dimensions



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Fan Heat (L/H)	Noise	Rec. Min. Install depth	Cut Out Size
SAH21BL	Matte Black	540 x 376mm	55w	380m ³ H	1100/2000w	48db(A)	200mm	528 x 345mm
SAH21WH	White	540 x 376mm	55w	380m ³ H	1100/2000w	48db(A)	200mm	528 x 345mm



Premium quality and high performance bathroom unit with integrated heat, light and exhaust functions.




AIRBUS

3-IN-1 BATHROOM UNIT


- High performance exhaust fan
- Radiant heat
- Quality energy saving 18w LED light
- Modern slimline and low profile aluminium fascia
- High efficiency low glare carbon filament
- Designed to maintain airflows over extended duct runs (up to 10 metres)

Maintains Pressure with Ducting



Designed to work on longer duct runs.


Dimensions



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
PVP31HLXWH	White	530 x 360mm	65w	330m³/h	45dB(A)	2 x 600w	1 x 18w LED	220mm	505 x 330mm



NEW PRODUCT!




MADRID

3-IN-1 BATHROOM UNIT

- Stylish ultra slim design
- Energy efficient and self-regulating two heat level fan heater
- Dedicated high performance extraction fan
- High 1900 Lumen, 4000k natural white LED panel

Dimensions



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Fan Heat (L/H)	Light	Noise	Lumens	Rec. Min. Install depth	Cut Out Size
MAD31FHLX	White	630 x 350mm	50w	330m ³ H	1400/2000w	1 x 20w LED	49.5dB(A)	1900Lm	200mm	590 x 320mm







SUNSET

FLUSH MOUNT RADIANT BATHROOM HEATER

- High efficiency 1200w low glare heater
- Premium grade dark onyx ceramic glass
- Provides instant radiant heat
- IP65 dust and moisture rating
- Ultra slim flush mount design
- Ideal for limited roof space installations



Dimensions



A	B	C
602mm	219mm	120mm

Model	Colour	Dimensions	Heat Wattage	IP Rating	Cut Out Size	Heat Fascia
SUN1200WHS	Matte Black	602 x 219mm	1200w	IP65	586mm x 206mm	Black Ceramic Glass

HIGH AIRFLOW



BROOK 2

HIGH AIRFLOW HEAT, LIGHT & EXHAUST

- Instant infrared heat globes
- Energy efficient flush mount LED downlight
- Aluminium ducting and external grille included
- Easy to install and clean
- Thermal safety feature
- Energy saving backdraft stopper
- 3 year warranty, with 2 year in-home service period



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
VHF2W	White	524 x 305mm	40w	360m ³ H	44dB(A)	2 x 275w	1 x 10w LED	220mm	465 x 245mm

HIGH AIRFLOW



BROOK 4

HIGH AIRFLOW HEAT, LIGHT & EXHAUST

- Instant infrared heat globes
- Energy efficient flush mount LED downlight
- Aluminium ducting and external grille included
- Easy to install and clean
- Thermal safety feature
- Energy saving backdraft stopper
- 3 year warranty, with 2 year in-home service period



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
VHF4W	White	450 x 450mm	40w	360m ³ H	44dB(A)	4 x 275w	1 x 10w LED	220mm	375 x 375mm



MYKA 2

3-IN-1 SLIMLINE LOW PROFILE

- Energy efficient flush mount LED downlight
- Two instant radiant heat globes
- Side ducted ball bearing exhaust fan
- Aluminium ducting and external grille included
- Thermal safety feature
- Energy saving backdraft stopper
- 3 year warranty, with 2 year in-home service period





Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
M2HDLXS	Silver	420 x 245mm	45w	280m ³ h*	38dB(A)	2 x 275w	1 x 10w 800Lm LED	220mm	370 x 202mm
M2HDLXWH	White	420 x 245mm	45w	280m ³ h*	38dB(A)	2 x 275w	1 x 10w 800Lm LED	220mm	370 x 202mm



MYKA 4

3-IN-1 SLIMLINE LOW PROFILE

- Energy efficient flush mount LED downlight
- Four instant radiant heat globes
- Side ducted ball bearing exhaust fan
- Aluminium ducting and external grille included
- Thermal safety feature
- Energy saving backdraft stopper
- 3 year warranty, with 2 year in-home service period

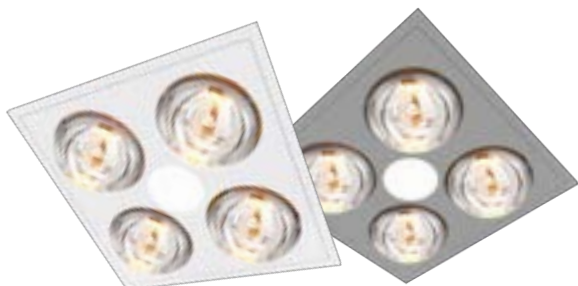

Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
M4HDLXS	Silver	370 x 370mm	45w	268m ³ h*	38dB(A)	4 x 275w	1 x 10w 800Lm LED	220mm	320 x 320mm
M4HDLXWH	White	370 x 370mm	45w	268m ³ h*	38dB(A)	4 x 275w	1 x 10w 800Lm LED	220mm	320 x 320mm



KLEIN 2

3-IN-1 BATHROOM UNIT - BUILDERS CHOICE

- Heat, light and exhaust unit
- Bright LED centre globe
- Instant radiant heat

- Quiet sided ducted exhaust fan
- Energy saving backdraft stopper
- Stylish low profile design



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
H2W	White	440 x 230mm	30w	200m ³ H*	38dB(A)	2 x 275w	1 x 6w LED R63	220mm	370 x 202mm




KLEIN 4

3-IN-1 BATHROOM UNIT - BUILDERS CHOICE

- Heat, light and exhaust unit
- Bright LED centre globe
- Instant radiant heat

- Quiet sided ducted exhaust fan
- Energy saving backdraft stopper
- Stylish low profile design



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Heat	Light	Rec. Min. Install depth	Cut Out Size
H4W	White	430 x 375mm	30w	200m ³ H*	38dB(A)	4 x 275w	1 x 6w LED R80	220mm	320 x 320mm




CAPRI

3-IN-1 PREMIUM HEAT, LIGHT & EXHAUST

- High quality 3-in-1 bathroom unit
- LED globes with a high lumen output
- High air extraction
- Instant radiant heat
- Slim profile, ideal for multi-level and tight spaces
- Removable fascia for easy cleaning



Dimensions



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Heater	Light	Rec. Min. Install depth	Cut Out Size
MRPQWH	White	350 x 500mm	55w	500m ³ /H	1000w Halogen	4 x 4w GU10	220mm	464 x 314mm
MRPQBL	Black	350 x 500mm	55w	500m ³ /H	1000w Halogen	4 x 4w GU10	220mm	464 x 314mm




RIO

3-IN-1 PREMIUM HEAT, LIGHT & EXHAUST

- Superior 3-in-1 bathroom unit
- LED globes with a high lumen output
- High air extraction
- Instant radiant heat
- Slim profile, ideal for multi-level and tight spaces
- Removable fascia for easy cleaning



Dimensions



A	B	C	D	E	F	G
350mm	500mm	202mm	214mm	464mm	213mm	314mm

Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Heater	Light	Rec. Min. Install depth	Cut Out Size
MRHGXWH	White	350 x 500mm	55w	500m ³ /h	1000w Halogen	2 x 12w LED	220mm	464 x 314mm
MRHGXBL	Black	350 x 500mm	55w	500m ³ /h	1000w Halogen	2 x 12w LED	220mm	464 x 314mm




SIERRA 2

PREMIUM HEAT, LIGHT & EXHAUST

- Superior 3-in-1 bathroom unit
- Quality tri-colour LED downlight (3,000 | 4,200 | 6,500k)
- High air extraction
- Instant radiant heat
- Slim profile, ideal for multi-level and tight spaces
- Removable fascia for easy cleaning



Dimensions



A	B	C	D	E	F	G	H
290mm	480mm	195mm	480mm	430mm	36mm	250mm	118mm

Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Heater	Light	Rec. Min. Install depth	Cut Out Size
MR2DXWH	White	290 x 480mm	40w	460m ³ /h	2 x 275w Infrared	13w tri downlight	220mm	430 x 250mm
MR2DXBL	Black	290 x 480mm	40w	460m ³ /h	2 x 275w Infrared	13w tri downlight	220mm	430 x 250mm




SIERRA 4

PREMIUM HEAT, LIGHT & EXHAUST

- Superior 3-in-1 bathroom unit
- Quality tri-colour LED downlight (3,000 | 4,200 | 6,500k)
- High air extraction
- Instant radiant heat
- Slim profile, ideal for multi-level and tight spaces
- Removable fascia for easy cleaning



Dimensions



A	B	C	D	E	F	G
360mm	480mm	195mm	Ø118mm	430mm	36mm	270mm

Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Heater	Light	Rec. Min. Install depth	Cut Out Size
MR4DXWH	White	360 x 480mm	40w	460m ³ /h	4 x 275w Infrared	13w tri downlight	220mm	430 x 270mm
MR4DXBL	Black	360 x 480mm	40w	460m ³ /h	4 x 275w Infrared	13w tri downlight	220mm	430 x 270mm

OUTDOOR HEATERS



SUNBURST MINI

INFRARED RADIANT HEATER

- All new patented design with long range heat output
- Engineered to maximise efficient heat distribution
- Creates a warm and comfortable atmosphere
- Compact, discreet and easy to install
- IP65 protection rating
- 1000w ideal for bathrooms and smaller covered outdoor areas
- 2000w ideal for larger covered outdoor areas

Model	Name	Colour	Heat Wattage	Dimensions	Heating Area	IP Rating
SUNB1000BL	Sunburst Mini	Black	1000 watts	190 x 460 x 113mm	6.8m ²	IP65
SUNB2000BL	Sunburst Mini	Black	2000 watts	190 x 460 x 113mm	11.33m ²	IP65



NEW PRODUCT!



SUNBURST 3000

COMMERCIAL INFRARED RADIANT HEATER

- Instant heat from switch on
- One second heat up time
- Economical and easy to install
- Long life carbon fibre lamp
- Precision heating directed where you need it
- Great for pub, bars, restaurants, cafe, factory or an commercial outdoor setting

Model	Name	Colour	Heat Wattage	Dimensions	Heating Area	IP Rating
SUNB3000BL	Sunburst 3000	Black	3000 watts	150 x 935 x 85.5mm	18m ²	IP54



SUNSET

RADIANT OUTDOOR STRIP HEATER*

- High efficiency radiant heat for instant warming effect
- Premium quality Schott Glass, allows for excellent heat transfer
- Wall, ceiling or flush mount. Compatible Flush Mount Kit optional
- Remote control with three heat settings and timer included
- IP65 weather rating, ideal for any outdoor conditions

*Suitable as flush mounted bathroom unit



FLUSH MOUNT

FLUSH MOUNT HOUSING KIT

This kit is an ideal way to neatly install the Sunset heater into a ceiling model no: SUNFMH

Model	Name	Colour	Heat Wattage	Dimensions	Heating Area	IP Rating	Remote Control
SUN1800WHS	Sunset	Black	1800 watts	900 x 170 x 80mm	10m ²	IP65	Included



HEATWAVE PRO

RADIANT OUTDOOR STRIP HEATER

- Outdoor infrared heater
- Create a warm and ambient environment
- IP65 ideal for outdoor use
- Aluminium casing
- Corrosion-resistant materials
- Wall or ceiling mountable
- Remote control option (-R models)

Model	IR Remote Control	Wattage	Heat Element	DIY	Size	Heating Area	IP Rating
VSH1800	No	1800 watts	Aluminium Alloy	Plug & Lead	1225 x 177 x 60mm	3.4m ²	IP65
VSH1800-R	Remote Included	1800 watts	Aluminium Alloy	Plug & Lead	1225 x 177 x 60mm	3.4m ²	IP65
VSH2400	No	2400 watts	Aluminium Alloy	Plug & Lead	1505 x 177 x 60mm	4.3m ²	IP65
VSH2400-R	Remote Included	2400 watts	Aluminium Alloy	Plug & Lead	1505 x 177 x 60mm	4.3m ²	IP65
VSH3200	No	3200 watts	Aluminium Alloy	Plug & Lead 15(A)	1915 x 177 x 60mm	5.8m ²	IP65
VSH3200-R	Remote Included	3200 watts	Aluminium Alloy	Plug & Lead 15(A)	1915 x 177 x 60mm	5.8m ²	IP65

VENTILATION

Engineered from the ground up

Ventair's exhaust fans have raised the standard for air movement in homes all around Australia. With five performance levels and a wide range of stylish fascia's - the AIRBUS range is Australia's most comprehensive selection of domestic exhaust fans.

COMPLIANCE AND THE IMPORTANCE OF VENTILATION


The National Construction Code (NCC) 2022 have recently introduced new provisions to help minimise the incidence of condensation within houses and apartments. The condensation management changes build upon the initial provisions introduced in 2019.

What has changed?

Exhaust and Ducting: provisions have become even more specific, especially regarding the discharging of the exhausted air.

Exhausting air directly into a ceiling space is no longer permissible: An exhaust from a kitchen, kitchen range hood, bathroom, powder room or laundry must now discharge via a shaft or duct to outdoor air.

Run On Timers: NCC 2022 also states that, rooms not ventilated in accordance with ABCB Housing Provisions 10.6.2(a) should incorporate a 10 minute (minimum) Run on Timer in the exhaust system, to assist with condensation management in areas deemed to have poor natural ventilation.

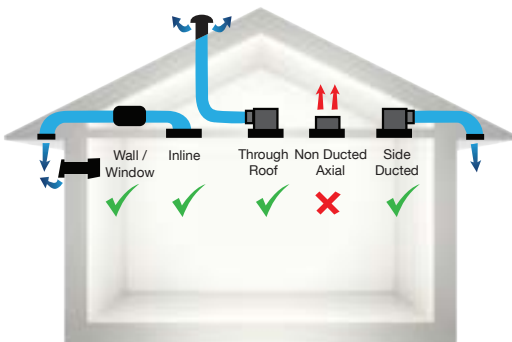

Ventair offers a full range of compliant exhaust solutions:

- Wall / Window Fans
- Inline Fans (eave or wall vent)
- Through Roof Fans and Cowls
- Side Ducted Fans (eave or wall vent)
- Adjustable Run-on Timers

Required Airflow Rates have remained unchanged however several factors should be considered before choosing your exhaust.



TOILETS
(25L/sec)



***BATHROOMS**
(25L/sec)



LAUNDRIES
(40L/sec)



KITCHENS
(40L/sec)

***Bathrooms** in colder or humid climates would require a much higher airflow rate than minimum rate listed. Example: A large open bathroom in a cold climate may require up to 100L/sec (360m³/H) in order to effectively control steam and condensation.



Adding Duct to an existing fan will increase the pressure in the system in turn decreasing airflow. A good quality exhaust fan is designed to maintain acceptable levels of airflow over longer duct runs while sub-standard products may suffer rapid loss of performance.



Protect your most valuable assets by using the 'Tried and Trusted' Ventair range of exhaust fan solutions. Avoid common problems that can be attributed to poor ventilation and condensation build up.



CONDENSATION

A SILENT ENEMY

Condensation is the opposite of evaporation, it is the process in which water vapor becomes liquid. Warm moist air will condensate into small droplets on cold surfaces, or as steam, when it mixes with colder dry air.

Contributing Factors:

- Poor Ventilation
- Levels of moisture in the air (humidity)
- Temperature of the air in your home
- The surface temperature of walls, windows and fixtures



Damaging Effects:

- Mould growth and damp spots
- Negative impact on occupants health and wellbeing
- Damage to furniture, fittings and flooring
- Long term structural damage or corrosion

Main Causes:

- Showering or bathing
- Cooking or boiling water
- Tumble dryer and drying clothes indoors
- Breathing - In fact, each person may contribute to up to two litres of water per day into the surrounding indoor air





Choosing a good quality exhaust fan is an important step in creating a healthy living environment for you and your family.

Modern Day 'energy efficient' homes are more 'airtight' by design and actually create an increased potential for condensation and poor air quality.




Ventair offers a full range of exhaust and ventilation solutions and covers a wide scope of residential and commercial applications.



UNDERSTANDING AIRFLOW

Principles of Airflow

Air behaves very much like a fluid. It will flow from areas of higher pressure to areas of lower pressure.

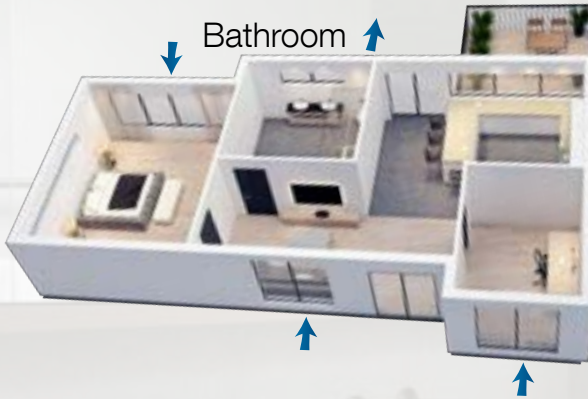


Direction of airflow


When we run an exhaust fan in a bathroom, laundry and toilet, we create a negative pressure that will naturally try to draw air from surrounding areas. This is a great way to keep moisture and odours under control, by ensuring air is flowing in the right direction through your house.

Supply air

Placing your exhaust further away from the replacement air source will create a better airflow within the room itself.

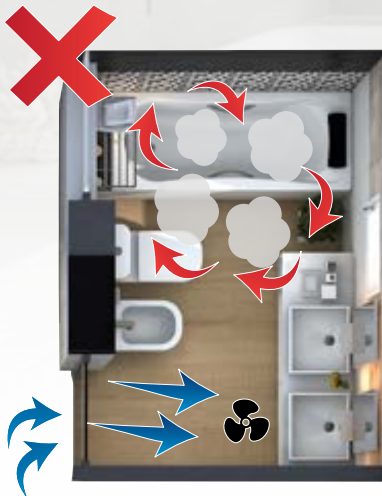

Air Supply

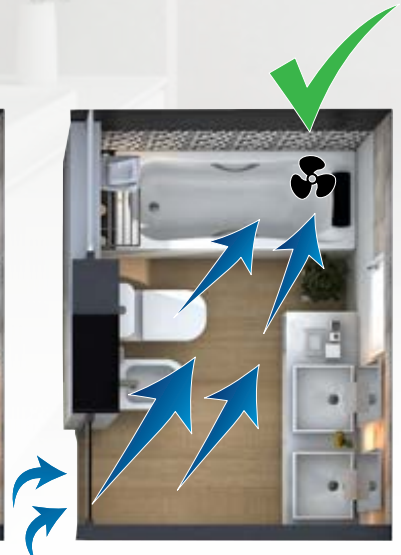

Air Supply

HEALTHY VENTILATION SOLUTIONS


The Modern Day Dilemma

Unfortunately, healthy ventilation is becoming increasingly difficult to manage due to the 'airtightness' of modern-day design and construction of "Energy Efficient" buildings and homes.



Mechanical Extraction Ventilation

MEV's are whole dwelling ventilation systems that supply and extract air continuously at a low rate. Designed with multiple extract points to simultaneously draw moisture laden and stale air out of bathrooms, toilets, laundries and kitchens providing a quieter and more efficient system than individual exhaust fans

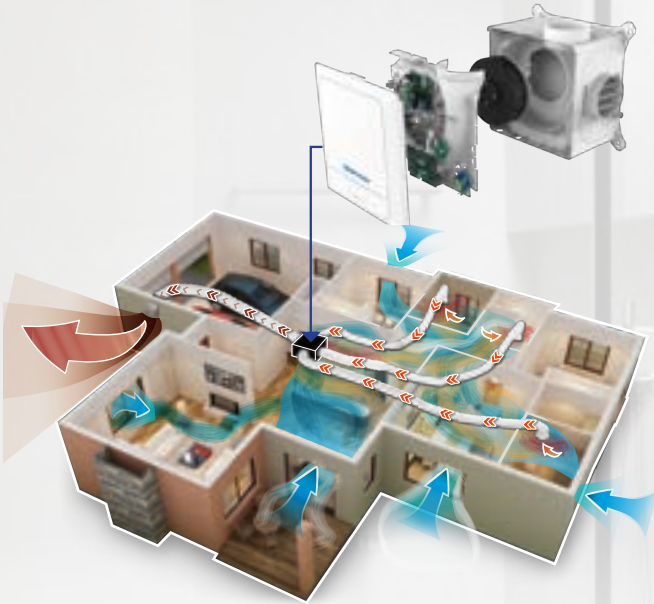

Continuous Run Ventilation

Is an excellent solution to modern day ventilation problems. Some of the Vent-Axia products have app controllable smart technology that can instantly change from 'trickle' to 'boost' in response to steam, odour and even light sensitivity.



QUICK SELECTION GUIDE

- 1 Select room type
- 2 Select approximate duct length
- 3 Select corresponding Airbus model
- 4 Select Fascia style

- POWDER ROOMS
- TOILETS



- LAUNDRIES



- STANDARD BATHROOMS
- ENSUITES



- LARGE OPEN BATHROOMS
- HIGH STEAM AREAS



- BOOST FUNCTION



- 24/7 CONTINUOUS HEALTHY VENTILATION



AIRBUS 200 100mm Duct Ø Compatible EC	AIRBUS 500 150mm Duct Ø Compatible EC	AIRBUS 150 100mm Duct Ø Compatible	AIRBUS 200 100mm Duct Ø Compatible	AIRBUS 225 150mm Duct Ø Compatible	AIRBUS 250 150mm Duct Ø Compatible	AIRBUS 300 150mm Duct Ø Compatible
✓ 0m - 8m Duct Length	✗	✓ 0m - 3m Duct Length	✓ 0m - 6m Duct Length	✓ 0m - 10m Duct Length	✗	✗
✓ 0m - 6m Duct Length	✗	✗	✓ 0m - 2m Duct Length	✓ 0m - 6m Duct Length	✓ 0m - 10m Duct Length	✗
✗	✓ 0m - 12m Duct Length	✗	✗	✓ 0m - 2m Duct Length	✓ 0m - 7m Duct Length	✓ 0m - 12m Duct Length
✗	✓ 0m - 10m Duct Length	✗	✗	✗	✓ 0m - 5m Duct Length	✓ 0m - 10m Duct Length
✓	✓	✗	✗	✗	✗	✗
✓	✓	✗	✗	✗	✗	✗



NEW PRODUCT!



AIRBUS **EC** 200 / 500

24/7 HEALTHY VENTILATION

24/7 CONTINUOUS VENTILATION FOR YOUR HOME
COMPLETE EXHAUST UNITS

- Continuous trickle setting (24/7) silently eliminates stale/moist air which is replenished naturally with fresh air.
- Three speed energy efficient EC motor ensures low operating costs



Green Fact:

The cost* of continuous running on 24/7 setting is less than \$1.00 per month
*Based on 42 cents per kWh.



Wireless Wall Controller: included



BOOST - 10 minutes for rapid steam/odour removal, then reverts back to 24/7



RUN - 20 minutes for excellent all round performance, then reverts back to 24/7



24/7 - Continuous trickle extraction creates a healthier living environment




Isolation Switch: not included

Can turn the unit ON / OFF and will default to the "RUN" setting when turned on



PERFORMS WITH EXTENDED DUCTING

24/7 : RUN : BOOST :




AIRBUS **EC** 200

- Ideal for powder rooms, toilets and laundries
- LED option: 10w light | Tri Colour (WW/NW/CW)

Model	Fascia Style	Fascia Size	LED Light	Power	Airflow	Noise	Duct Outlet	Rec. Min. Install depth	Cutout
PVPXEC200RD	Round	Ø270mm	NA	24w ^{Boost}	245m ³ /h ^{Boost}	37dB(A) ^{Boost}	Ø100mm	200mm	Ø240mm
PVPXEC200RD-LED	Round	Ø270mm	Yes	14w ^{Run}	180m ³ /h ^{Run}	30dB(A) ^{Run}			
PVPXEC200SQ	Square	272 x 272mm	NA	3w ^{24/7}	65m ³ /h ^{24/7}	28dB(A) ^{24/7}			
PVPXEC200SQ-LED	Square	272 x 272mm	Yes						

PERFORMS WITH EXTENDED DUCTING

24/7 : RUN : BOOST :

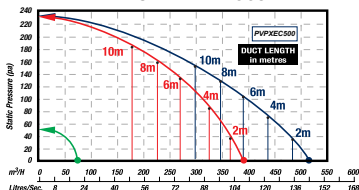

AIRBUS **EC** 500

- Ideal for ensuites, bathrooms and large open bathrooms
- LED option: 14w light | Tri Colour (WW/NW/CW)

Model	Fascia Style	Fascia Size	LED Light	Power	Airflow	Noise	Duct Outlet	Rec. Min. Install depth	Cutout
PVPXEC500RD	Round	Ø328mm	NA	80w ^{Boost}	510m ³ /h ^{Boost}	44dB(A) ^{Boost}	Ø150mm	220mm	Ø300mm
PVPXEC500RD-LED	Round	Ø328mm	Yes	35w ^{Run}	380m ³ /h ^{Run}	40dB(A) ^{Run}			
PVPXEC500SQ	Square	328 x 328mm	NA	3w ^{24/7}	70m ³ /h ^{24/7}	21dB(A) ^{24/7}			
PVPXEC500SQ-LED	Square	328 x 328mm	Yes						

*Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.

NEW PRODUCT!



AIRBUS **EC** 200 / 500

24/7 HEALTHY VENTILATION

24/7 CONTINUOUS VENTILATION FOR YOUR HOME
MOTOR & CHOICE OF FASCIAS

- Continuous trickle setting (24/7) silently eliminates stale/moist air which is replenished naturally with fresh air.
- Three speed energy efficient EC motor ensures low operating costs



Green Fact:

The cost* of continuous running on 24/7 setting is less than \$1.00 per month
 *Based on 42 cents per kWh.



Wireless Wall Controller: included



BOOST - 10 minutes for rapid steam/odour removal, then reverts back to 24/7



RUN - 20 minutes for excellent all round performance, then reverts back to 24/7



24/7 - Continuous trickle extraction creates a healthier living environment

Model	Style	Power	Airflow	Noise	Duct Outlet	Rec. Min. Install depth	Cutout
PVPXEC200	Motor Body	24w ^{Boost}	245m ³ H ^{Boost}	37dB(A) ^{Boost}	Ø100mm	200mm	Ø240mm
		14w ^{Run}	180m ³ H ^{Run}	30dB(A) ^{Run}			
		3w ^{24/7}	65m ³ H ^{24/7}	28dB(A) ^{24/7}			

Model	Style	Power	Airflow	Noise	Duct Outlet	Rec. Min. Install depth	Cutout
PVPXEC500	Motor Body	80w ^{Boost}	510m ³ H ^{Boost}	44dB(A) ^{Boost}	Ø150mm	220mm	Ø300mm
		35w ^{Run}	380m ³ H ^{Run}	40dB(A) ^{Run}			
		3w ^{24/7}	70m ³ H ^{24/7}	21dB(A) ^{24/7}			

*Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.



CHOOSE YOUR FASCIA:



FASCIAS TO SUIT AIRBUS EC 200 MOTOR

ABG200WH-RD	White Round	ABGHF200MB-RD	Matte Black High Flow Round
ABG200SS-RD	Silver Round	ABGHF200MB-SQ	Matte Black High Flow Square
ABG200BL-RD	Black Round	ABGLED200WH-RD	White Round 10w 1050Lm* LED Light IP44
ABG200WH-SQ	White Square	ABGLED200SS-RD	Silver Round 10w 855Lm LED Light IP44
ABG200SS-SQ	Silver Square	ABGLED200BL-RD	Black Round 10w 855Lm LED Light IP44
ABG200BL-SQ	Black Square	ABGLED200WH-SQ	White Square 10w 855Lm LED Light IP44
ABGGP200WH-RD	White Glass Panel Round	ABGLED200SS-SQ	Silver Square 10w 855Lm LED Light IP44
ABGGP200WH-SQ	White Glass Panel Square	ABGLED200BL-SQ	Black Square 10w 855Lm LED Light IP44
ABGGP200BL-RD	Black Glass Panel Round	ABGHFLED200WH-RD	White High Flow Round 10w 1050Lm* LED Light IP44
ABGGP200BL-SQ	Black Glass Panel Square	ABGHFLED200WH-SQ	White High Flow Square 10w 1200Lm* LED Light IP44
ABGHF200WH-RD	White High Flow Round		
ABGHF200WH-SQ	White High Flow Square		

FASCIAS TO SUIT AIRBUS EC 500 MOTOR

ABG250WH-RD	White Round	ABGHF250MB-RD	Matte Black High Flow Round
ABG250SS-RD	Silver Round	ABGHF250MB-SQ	Matte Black High Flow Square
ABG250BL-RD	Black Round	ABGLED250WH-RD	White Round 14w 1440Lm* LED Light IP44
ABG250WH-SQ	White Square	ABGLED250SS-RD	Silver Round 14w 1290Lm LED Light IP44
ABG250SS-SQ	Silver Square	ABGLED250BL-RD	Black Round 14w 1290Lm LED Light IP44
ABG250BL-SQ	Black Square	ABGLED250WH-SQ	White Square 14w 1600Lm* LED Light IP44
ABGGP250WH-RD	White Glass Panel Round	ABGLED250SS-SQ	Silver Square 14w 1290Lm LED Light IP44
ABGGP250WH-SQ	White Glass Panel Square	ABGLED250BL-SQ	Black Square 14w 1290Lm LED Light IP44
ABGGP250BL-RD	Black Glass Panel Round	ABGHFLED250WH-RD	White High Flow Round 14w 1440Lm* LED Light IP44
ABGGP250BL-SQ	Black Glass Panel Square	ABGHFLED250WH-SQ	White High Flow Square 14w 1600Lm* LED Light IP44
ABGHF250WH-RD	White High Flow Round		
ABGHF250WH-SQ	White High Flow Square		

*Tri colour version Warm White | Natural White | Cool White - average Lumens.



AIRBUS 150

TOTAL EXHAUST SOLUTION

GREAT FOR TOILETS & POWDER ROOMS
COMPLETE EXHAUST UNITS

- Suitable for longer duct runs
- Ideal for multi-story applications
- Premium ball bearing motor
- Energy saving backdraft stopper included
- Super low profile
- LED option: 14w light | 1400Lm | 4200k | Natural

**Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.*

Model	Fascia Style	Fascia Size	Exhaust Power	Air Delivery	Noise	Duct Outlet Size	Rec. Min. Install depth	Cut Out Size
PVPX150WH/BL	Round White/Black	Ø210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm
PVPX150WHSQ/BLSQ	Square White/Black	210 x 210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm
PVPX150WHGP/BLGP	Round White/Black Glass Panel	Ø210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm
PVPX150WHSQGP/BLSQGP	Square White/Black Glass Panel	210 x 210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm
PVPX150LED	Round White LED	Ø210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm
PVPX150SQLED	Square White LED	210 x 210mm	25w	130m ³ H*	38dB(A)	100mm	220mm	Ø197mm



AIRBUS²⁰⁰

TOTAL EXHAUST SOLUTION

MID LEVEL AIR EXTRACTION
COMPLETE EXHAUST UNITS

- Ideal for powder rooms, toilets and laundries
- Perfect for multi-story applications
- Premium ball bearing motor
- Energy saving backdraft stopper included
- Super low profile
- Also available with LED option

**Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.*

Model	Colour	Fascia Style	Size	Exhaust Power	Air Delivery	Noise	Duct Outlet	Rec. Min. Install depth	Cut Out Size
PVPX200WH	White	Round	Ø270mm	30w	175m ³ H*	38dB(A)	Ø100mm	220mm	Ø240mm
PVPXHF200RD	White	Round	Ø270mm	30w	175m ³ H*	38dB(A)	Ø100mm	220mm	Ø240mm
PVPX200WHSQ	White	Square	272 x 272mm	30w	175m ³ H*	38dB(A)	Ø100mm	220mm	Ø240mm
PVPXHF200SQ	White	Square	272 x 272mm	30w	175m ³ H*	38dB(A)	Ø100mm	220mm	Ø240mm



AIRBUS 250

TOTAL EXHAUST SOLUTION

HIGH LEVEL AIR EXTRACTION COMPLETE EXHAUST UNITS

- Suitable for longer duct runs
- Ideal for multi-story applications
- Premium ball bearing motor
- Backdraft stopper included
- Commercial grade Japanese bearings
- Rated to 80,000 hours continuous run
- Easy to install and clean
- Super low profile

**Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.*

Model	Colour	Fascia Style	Fascia Size	Exhaust Power	Air Delivery	Noise	Duct Outlet	Rec. Min. Install depth	Cut Out Size
PVPX250WH	White	Round	Ø328mm	50w	378m ³ H*	42dB(A)	Ø150mm	220mm	Ø300mm
PVPXHF250RD	White	Round	Ø328mm	50w	378m ³ H*	42dB(A)	Ø150mm	220mm	Ø300mm
PVPX250WHSQ	White	Square	328 x 328mm	50w	378m ³ H*	42dB(A)	Ø150mm	220mm	Ø300mm
PVPXHF250SQ	White	Square	328 x 328mm	50w	378m ³ H*	42dB(A)	Ø150mm	220mm	Ø300mm

**ULTIMATE AIR
EXTRACTION**



AIRBUS 300


TOTAL EXHAUST SOLUTION

ULTRA HIGH AIR EXTRACTION
COMPLETE EXHAUST UNITS

- Unsurpassed air extraction
- Designed to maintain airflows over extended duct runs (up to 10 metres)
- Modern slimline fascia designed for maximising airflow
- Available in round or square fascia style

*Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.

Maintains Pressure with Ducting*

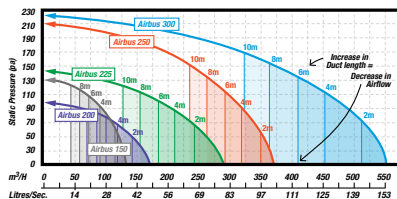

*Airbus airflow data may vary depending on style of fascia used.

Designed to work on longer duct runs.

Model	Fascia Style	Fascia Size	Exhaust Power	Air Delivery	Noise	Duct Outlet	Rec. Min. Install depth	Cut Out Size
PVPX300WH	Round	Ø326mm	106w	550m ³ h*	42dB(A)	Ø150mm	220mm	Ø300mm
PVPX300WHSQ	Square	326 x 326mm	106w	550m ³ h*	42dB(A)	Ø150mm	220mm	Ø300mm



AIRBUS200

TOTAL EXHAUST SOLUTION

MID LEVEL AIR EXTRACTION MOTOR & CHOICE OF FASCIAS

- Ideal for powder rooms, toilets and laundries
- Suitable for longer duct runs
- Ideal for multi-story applications
- Premium ball bearing motor
- Super low profile, that easy to install and clean
- Energy saving backdraft stopper included
- Built in adjustable timer option available

*Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.



*4 Pin Plug and socket Included with Timer models

Model	Style	Exhaust Power	Air Delivery	Run on Timer	Noise	Duct Outlet	Rec. Min. Install depth	Cut Out Size
PVPX200	Motor Body	30w	175m ³ H	No	38dB(A)	Ø100mm	220mm	Ø240mm
PVPX200T	Motor Body	30w	175m ³ H	1-25 mins	38dB(A)	Ø100mm	220mm	Ø240mm



CHOOSE YOUR FASCIA:



- ABG200WH-RD** White Round
- ABG200SS-RD** Silver Round
- ABG200BL-RD** Black Round
- ABG200WH-SQ** White Square
- ABG200SS-SQ** Silver Square
- ABG200BL-SQ** Black Square
- ABGGP200WH-RD** White Glass Panel Round
- ABGGP200WH-SQ** White Glass Panel Square
- ABGGP200BL-RD** Black Glass Panel Round
- ABGGP200BL-SQ** Black Glass Panel Square
- ABGHF200WH-RD** White High Flow Round
- ABGHF200WH-SQ** White High Flow Square

- ABGHF200MB-RD** Matte Black High Flow Round
- ABGHF200MB-SQ** Matte Black High Flow Square
- ABGLED200WH-RD** White Round 10w 1050Lm* LED Light IP44
- ABGLED200SS-RD** Silver Round 10w 855Lm LED Light IP44
- ABGLED200BL-RD** Black Round 10w 855Lm LED Light IP44
- ABGLED200WH-SQ** White Square 10w 855Lm LED Light IP44
- ABGLED200SS-SQ** Silver Square 10w 855Lm LED Light IP44
- ABGLED200BL-SQ** Black Square 10w 855Lm LED Light IP44
- ABGHFLED200WH-RD** White High Flow Round 10w 1050Lm* LED Light IP44
- ABGHFLED200WH-SQ** White High Flow Square 10w 1200Lm* LED Light IP44

*Tri colour version Warm White / Natural White / Cool White - average Lumens.



AIRBUS 225 / 250

TOTAL EXHAUST SOLUTION

HIGH LEVEL AIR EXTRACTION
MOTOR & CHOICE OF FASCIAS

- Excellent airflow - ideal for bathrooms and toilets
- Suitable for longer duct runs
- Ideal for multi-story applications
- Premium ball bearing motor
- Super low profile, easy to install and clean
- Energy saving backdraft stopper included
- Built in adjustable timer option available



*4 Pin Plug and socket Included with Timer models

*Airflow data gathered in accordance with internationally recognised testing standards. Airflow may vary according to style of fascia used.

Model	Style	Exhaust Power	Air Delivery	Run on Timer	Noise	Duct Outlet	Rec. Min. Install depth	Cut Out Size
PVPX225	Motor Body	45w	290m ³ H*	No	40dB(A)	Ø150mm	220mm	Ø300mm
PVPX225T	Motor Body	45w	290m ³ H*	1-25 mins	40dB(A)	Ø150mm	220mm	Ø300mm
PVPX250	Motor Body	50w	378m ³ H*	No	42dB(A)	Ø150mm	220mm	Ø300mm
PVPX250T	Motor Body	50w	378m ³ H*	1-25 mins	42dB(A)	Ø150mm	220mm	Ø300mm



CHOOSE YOUR FASCIA:



- ABG250WH-RD** White Round
- ABG250SS-RD** Silver Round
- ABG250BL-RD** Black Round
- ABG250WH-SQ** White Square
- ABG250SS-SQ** Silver Square
- ABG250BL-SQ** Black Square
- ABGGP250WH-RD** White Glass Panel Round
- ABGGP250WH-SQ** White Glass Panel Square
- ABGGP250BL-RD** Black Glass Panel Round
- ABGGP250BL-SQ** Black Glass Panel Square
- ABGHF250WH-RD** White High Flow Round
- ABGHF250WH-SQ** White High Flow Square

- ABGHF250MB-RD** Matte Black High Flow Round
- ABGHF250MB-SQ** Matte Black High Flow Square
- ABGLED250WH-RD** White Round 14w 1440Lm* LED Light IP44
- ABGLED250SS-RD** Silver Round 14w 1290Lm LED Light IP44
- ABGLED250BL-RD** Black Round 14w 1290Lm LED Light IP44
- ABGLED250WH-SQ** White Square 14w 1600Lm* LED Light IP44
- ABGLED250SS-SQ** Silver Square 14w 1290Lm LED Light IP44
- ABGLED250BL-SQ** Black Square 14w 1290Lm LED Light IP44
- ABGHFLED250WH-RD** White High Flow Round 14w 1440Lm* LED Light IP44
- ABGHFLED250WH-SQ** White High Flow Square 14w 1600Lm* LED Light IP44

*Tri colour version Warm White / Natural White / Cool White - average Lumens.



INLINE

AXIAL INLINE EXHAUST FANS

- Energy efficient high performance motor
- Rated to 50,000 hours continuous run time
- Perfect for hot or cold air transfer
- Exhaust to exterior or room to room air transfer
- Maintains healthy fresh air circulation
- Minimal noise level
- 100mm - cupboards, pantries and poorly ventilated areas
- 150mm - ensuites, powder rooms, toilets and laundries
- AC plug and lead included. Easy fix mount brackets and easy to install



INL100




INL150

Model	Material	Motor Power	Air Delivery	Noise	IP Rating	Speed(RPM)	Duct Size
INL100	Aluminium Housing	18w	119m ³ H	40dB(A)	IP44	2700rpm	Ø100mm
INL150	Aluminium Housing	28w	379m ³ H	45dB(A)	IP44	2600rpm	Ø150mm



Connect to any style of AIRBUS 200 fascia - see page 41

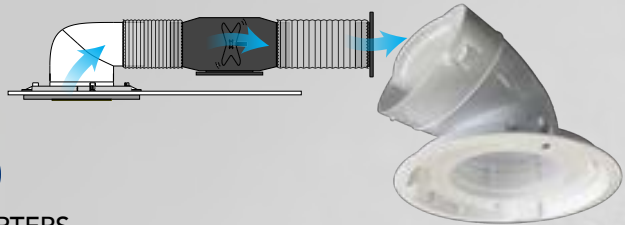


VMK150

MODULAR 150

150mm INTERIOR AIR VENT ADAPTERS


- Designed to be used in conjunction with Inline exhaust fan systems
- Versatile interior air vent adapter to connect any style Airbus 200 fascia with 150mm Inline exhaust fan system
- 360° swivel spigot
- Two height settings to assist joist clearance



VMFA150



Model	Colour	Duct Outlet Size	Cut Out Size	Min Install Depth
VMFK150	White	Ø150mm	Ø238mm	210mm
VMFA150	White	Ø150mm	Ø238mm	NA





MIXFLOW

PREMIUM HIGH POWERED MIXFLOW INLINE EXHAUST FAN

- Commercial grade performance
- Perfect for hot or cold air transfer
- Rated to 80,000 hours continuous run time
- High static pressure makes ideal for long duct runs
- Rated to 30,000 start cycles



Model	Colour	Motor Power	Air Delivery	Noise	IP Rating	Rec. Min. Install depth	Duct Outlet
VMFIL100	Black	30/25w	240m ³ H	37/30dB(A)	IPX4	250mm	Ø100mm
VMFIL150	Black	50/40w	561m ³ H	47/39dB(A)	IPX4	280mm	Ø150mm
VMFIL200	Black	130/105w	852m ³ H	53/45dB(A)	IPX4	300mm	Ø200mm

ACOUSTIC MIX FLOW INLINE FAN

- High performance mixed flow fan
- Variable speed controller for accurate airflow settings
- Low energy EC motor
- Fully attenuated case with low profile design
- Rugged mounting foot design
- Ideal for ducted applications

Vent-Axia Acoustic Inline Fan

A variable Speed Controller gives flexibility in setting Airflows to match individual applications

Long life, low energy motor

Fitted with an energy efficient, long life brushless EC motor, the fan is designed to minimise energy use whilst providing a long trouble free life. With a free air volume of 80l/s at only 17 watts the 150mm model has market leading performance.

Low noise

Sound levels as low as 28dBA its one of the quietest mixed flow fans available and offers a great solution where performance cannot be compromised, but low running noises are also required.



Model	Material	Motor Power (min/max)	Air Delivery	Noise Max	IP Rating	Speed(RPM) Max	Duct Size
ECSM150	Polypropylene	17w - 73w	602m ³ H	42.5dB(A)	IP44	3000rpm	Ø150mm
ECSM200	Polypropylene	38w - 165w	1250m ³ H	51.1dB(A)	IP44	3000rpm	Ø200mm



AIR TRANSFER KIT

150mm INLINE EXHAUST KIT

- Long life ball bearing motor
- Perfect for warm / cold air transfer
- Adjustable air intake / outlet vents included
- 1 x 6m aluminium ducting included (150mm)
- Low noise level and easy to install



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	IP Rating	Rec. Min. Install depth	Cut Out Size
VATK150	White	Ø206mm	25w	250m ³ H	41dB(A)	IPX4	200mm	Ø150mm



SHOWER LIGHT KIT

150mm INLINE EXHAUST KIT WITH LED LIGHT

- Long life ball bearing motor
- Energy saving LED light
- Full ducting kit included
- 1 x 6m aluminium ducting included (150mm)
- 1 x external grille
- Easy to install




Model	Colour	Exhaust Power	Air Delivery	Noise	Light	IP Rating	Rec. Min. Install depth	Cut Out Size
VEDLKWH	White	25w	210m ³ H	39dB(A)	10w LED 855Lm	IPX4	200mm	Ø158mm



WALL FAN

ALL PURPOSE WALL / CEILING EXHAUST FAN

- Reliable long lasting ball bearing motor
- Designed for wall or ceiling mount, easy to install
- Ideal for small laundries, pantries or low duty extraction
- Built-in timer model available

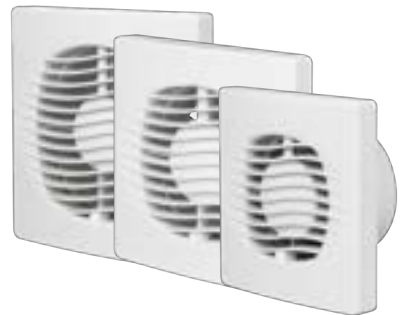

Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Built-In Timer	IP Rating	Cut Out Size
VWX100	White	155 x 155mm	20w	85m ³ H	36dB(A)	NA	IPX4	Ø105mm
VWX100T	White	155 x 155mm	20w	85m ³ H	36dB(A)	Yes	IPX4	Ø105mm
VWX125	White	169 x 169mm	25w	130m ³ H	38dB(A)	NA	IPX4	Ø125mm
VWX125T	White	169 x 169mm	25w	130m ³ H	38dB(A)	Yes	IPX4	Ø125mm
VWX150	White	200 x 200mm	25w	313m ³ H	41dB(A)	NA	IPX4	Ø150mm
VWX150T	White	200 x 200mm	25w	313m ³ H	41dB(A)	Yes	IPX4	Ø150mm



SLIMLINE

VERSATILE WALL / CEILING SLIMLINE EXHAUST FAN

- Designed for continuous running if required
- Keeps small rooms and damp areas ventilated
- Multi-purpose wall or ceiling mount
- Low install depth, making it easy to install and clean
- Energy saving backdraft stopper included



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	IP Rating	Rec. Min. Install depth	Cut Out Size
VSLF100	White	158 x 158mm	15w	70m ³ H	34dB(A)	IPX4	80mm for walls, 150 for ceiling	Ø98mm
VSLF125	White	180 x 180mm	20w	120m ³ H	36dB(A)	IPX4		Ø116mm
VSLF150	White	209 x 209mm	25w	210m ³ H	40dB(A)	IPX4		Ø148mm

NEW PRODUCT!



AUTO SHUTTER WALL FAN

150mm WALL MOUNTED EXHAUST FAN WITH AUTO SHUTTERS

- Quick and easy install
- Thermo electric shutters to prevent back draughts
- Suitable for wall or sandwich panel mounting
- Minimum install depth: 80mm
- IP44 rated



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Rec. Min. Install depth	Cut Out Size
VWF150AS	White	155 x 155mm	18.8w	245m ³ H	36dB(A)	80mm	Ø155 - 160mm

UNIVERSAL



WALL / CEILING MOUNTABLE EXHAUST FAN

- Long life ball bearing motor, making it quiet and efficient
- Backdraft stopper included
- Easy to install and clean



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	IP Rating	Rec. Min. Install depth	Cut Out Size
VUF150WH	White	193 x 193mm	25w	210m ³ H	39dB(A)	IPX4	200mm	Ø150mm



OLSON & OVATION

UNIVERSAL SIDE DUCTED EXHAUST FAN

- Long lasting ball bearing motor
- Improved motor design for higher airflow and low noise
- Suitable for most household applications
- Built in backdraft stopper
- Easy to install and clean

Model	Colour	Fascia Style	Fascia Size	Exhaust Power	Air Delivery	Noise	Light	Duct Outlet	Rec. Min. Install depth	Cut Out Size
OLSWURD	White	Round	Ø270mm	45w	270m ³ H	43dB(A)	NA	Ø125mm	200mm	Ø240mm
OLS250RD	White	Round	Ø323mm	40w	310m ³ H	43dB(A)	NA	Ø150mm	220mm	Ø295mm
OVAWUSQ	White	Square	270 x 270mm	45w	270m ³ H	43dB(A)	NA	Ø125mm	200mm	Ø240mm
OVA250SQ	White	Square	323 x 323mm	40w	310m ³ H	43dB(A)	NA	Ø150mm	220mm	Ø295mm
OLSWURD-LED	White	Round	Ø270mm	45w	270m ³ H	43dB(A)	10w LED	Ø125mm	200mm	Ø240mm



HIGH AIRFLOW



ULTRAFLO

HIGH AIR EXTRACTION EXHAUST FAN

- High air extraction axial series
- Long life ball bearing motor
- Fast steam and odour removal
- Energy saving built in draft stopper
- Airflow maximising grille design
- AC plug and lead supplied



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Rec. Min. Install depth	Cut Out Size
WRSAX200	White	Ø270mm	25w	480m ³ H	45dB(A)	250mm	Ø240mm
WRSAX250	White	Ø330mm	26w	750m ³ H	48dB(A)	250mm	Ø295mm



GYRO

AXIAL BALL BEARING EXHAUST FAN

- Traditional design with excellent airflow
- Retro-fit standard cutout size
- Quiet operation
- Easy to clean, removable grille



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Rec. Min. Install depth	Cut Out Size
PTBX200	White	Ø300mm	30w	273m ³ H	39dB(A)	250mm	Ø240mm
PTBX250	White	Ø353mm	35w	385m ³ H	48dB(A)	250mm	Ø295mm



NEW PRODUCT!

MULTIVENT

CONTINUOUS VENTILATION FOR HEALTHY HOMES

Model no: VMEV

- Energy efficient EC / DC motor
- Automated humidity sensing and control
- Continuous trickle extract ventilation
- Ultra quiet performance
- Healthier indoor air quality
- Compact design and easy to install

A Healthier living environment

The fully automatic Multivent ventilation system aids in the control of condensation, mould and indoor air pollutants. The system automatically adjusts the airflow according to the conditions and will even switch to boost mode when it detects a sudden rise in humidity as occurs during showering / bathing or drying clothes.

The 24/7 continuous 'trickle' setting, creates a negative pressure environment that gently removes moist and stale air and replaces it with a steady but subtle flow of fresh healthy air throughout your home.



MULTIVENT KIT

CONTINUOUS VENTILATION FOR HEALTHY HOMES

Model no: VMEV-KIT

KIT INCLUDES:

- MEV Base Unit
- 150mm Weatherproof Cowl with Backdraft Flap - V150WPC
- 3 x 125mm x 6m Aluminium Foil Flexible Duct
- 1 x 150mm x 6m Aluminium Foil Flexible Duct
- 3 x 125mm Cone Adjustable Main Flow Ceiling Extract Diffuser
- 150mm to 125mm Reducer and 150mm Joiner
- 30m x 48mm PVC Duct Tape



For more technical information on the Multivent please visit: www.ventair.com.au



AUTOMATED HUMIDITY SENSING & CONTROL



CONTINUOUS TRICKLE EXTRACT VENTILATION



ULTRA QUIET PERFORMANCE




EASY INSTALLATION



COMPACT DESIGN





PEACE OF MIND

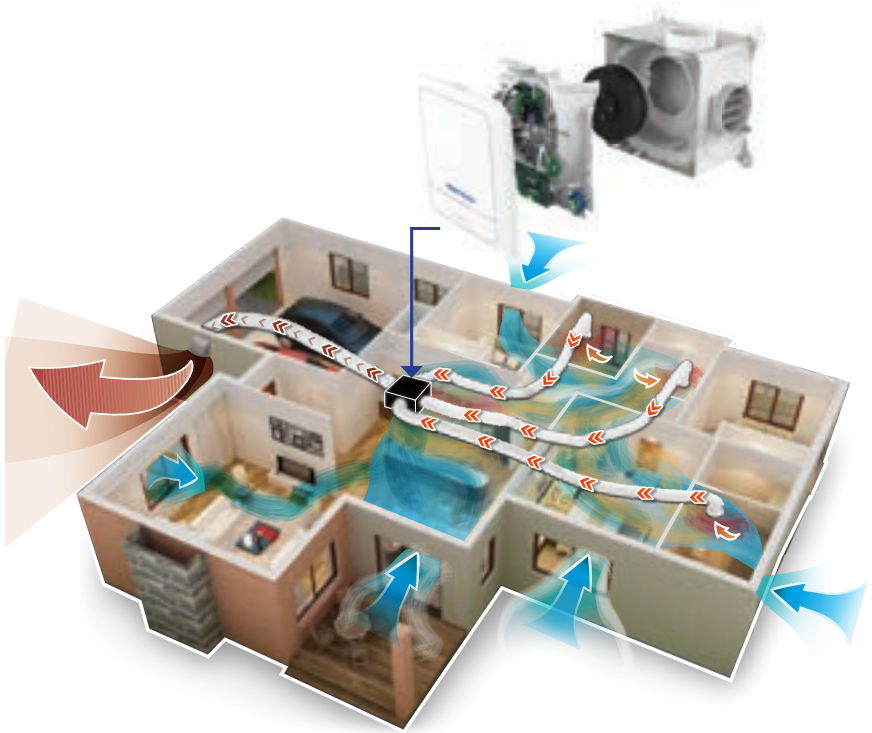

FRESH VENT

FRESH FILTERED SUPPLY AIR VENT

- Supplies fresh filtered air to replace the air extracted via exhaust fans
- Perfect for use in more airtight homes or homes with poor air circulation
- Replaceable filter designed to provide a very high separation capacity on particles of all sizes and types
- Discreet and minimal styling
- Wall or Ceiling adaptable

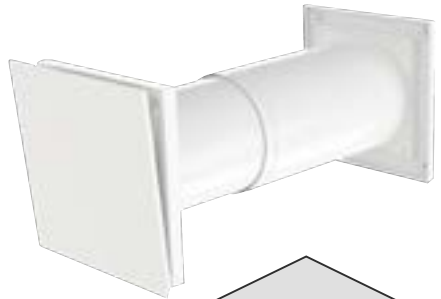

Replaceable flimmer filters available



Model	Colour	Duct Size	Mount Options	Cut Out Size
VAPFV100	White	Ø100mm	Wall or Ceiling	Ø100mm

Model	VARP100
-------	----------------



NEW PRODUCT!

PUREAIR ROOM 260X

PORTABLE AIR PURIFIER

- Six stage Advanced Filtration System including a medical grade H13 HEPA filter
- Eliminates 99.9% of airborne particles including mould, dust, odours and bacteria
- Air Quality display which indicates quality of air - good, bad or needs improving
- Suitable for multiple rooms types : domestic and commercial
- Eight hour timer with automatic shut off
- Unit comes with remote control and SmartLife app included
- Filter replacement reminder
- Child safety lock



Model no: FAN7450 | Replacement Filter: DCT4615

Six Stage Advanced Filtration System

- | | |
|----------------------------------|----------------------------|
| 1 Pre Filter | 4 Cold Catalyst |
| 2 HEPA Filters | 5 Ultraviolet Light |
| 3 Activated Carbon Filter | 6 Ionizer |





SIMPLY QUIET FAN

- As low as 5 watt power consumption
- Designed to perform under pressure
- High performance, low power
- Open front grille design
- As low as 25dB(A) noise levels
- 151/s at 25Pa
- Timer and Humidity timer options now available
- Two sizes to choose from



The Simply Quiet Fan Range offers high powered axial ventilation with a wide range of control and sizing options. This ensure that all your sites look consistent and that your teams can spend less time figuring out how to install different fans and focus on more important things.

The Simply Quiet Fan range is an intermittent fan family that offers a stylish appearance with high pressure capabilities meaning more duct for the same fan. With a highly efficient AC motor, the Simply Quiet Fan range can achieve energy efficient and also quite ventilation with power consumption as low as 7.5 watt and noise levels as lows as 25dB(A) at 3 meters.

Model	Material	Motor Power	Air Delivery	Noise	IP Rating	Timer	Humidistat	Duct Size
VASF125B	Polypropylene	14w	173m ³ /hr	38dB(A)	IP45	N/A	N/A	Ø125mm
VASF125T	Polypropylene	14w	173m ³ /hr	38dB(A)	IP45	Yes	N/A	Ø125mm
VASF125HT	Polypropylene	14w	173m ³ /hr	38dB(A)	IP45	Yes	Yes	Ø125mm
VASF150B	Polypropylene	19w	328m ³ /hr	41dB(A)	IP45	N/A	N/A	Ø150mm
VASF150T	Polypropylene	19w	328m ³ /hr	41dB(A)	IP45	Yes	N/A	Ø150mm
VASF150HT	Polypropylene	19w	328m ³ /hr	41dB(A)	IP45	Yes	Yes	Ø150mm



SVARA

100mm AXIAL FAN WITH BLUETOOTH APP

- 3 Speed, IP44 Rated, DC motor
- Low running costs and quiet operation
- Silent hours scheduling and purge mode functions
- Continuous or intermittent
- Multiple installation and commissioning options
- Set up and control through the App via Bluetooth
- Suitable for ceiling, panel or wall mounting
- Removable impeller for easier cleaning and replacement
- Intelligent light sensor with overrun timer



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Mount options	Cut Out Size
409802	White	Ø177mm	4w DC	36 - 108m ³ H	17dB(A)	Wall / Ceiling	Ø100mm



PUREAIR SENSE

ODOUR SENSING FAN WITH INTELLIGENT HUMIDISTAT

- Automatic odour sensor and intelligent humidistat
- Silent running with low power consumption
- Adjustable timer and speed settings
- LED touch panel and light sensor
- App connected
- Continuous or intermittent operation
- Interchangeable spigots for 100 or 125mm installations
- Easy clean with removable impeller
- Optional magnetic front cover



Model	Colour	Fascia Size	Exhaust Power	Air Delivery	Noise	Mount options	Cut Out Size
479460	White	185 x 160mm	2 - 5w DC	36 - 108m ³ H	19dB(A)	Wall / Ceiling	Ø103 - 130mm

THROUGH WALL KIT

DUCT EXTRACTED AIR THROUGH THE WALL TO OUTSIDE

- Adjustable tube length for all thickness from 100 to 230mm
- Perfect accessory for the Svava and PureAir Sense exhaust fans
- Can be used for most 100mm wall exhaust fans
- Louvre weatherproof external grille



Model	Colour	Duct Size	Mount Options	Cut Out Size
VA100TWK	White	Ø100mm	Wall or Ceiling	Ø100mm



LOW VOLTAGE WALL FAN (SELV)

100 - 150mm SAFETY EXTRA LOW VOLTAGE (SELV) WALL / CEILING MOUNTED FAN

- Designed for wall or ceiling mounting, efficient and easy to install
- 12VAC transformer included and suitable for installation in damp areas
- Axial fan with ball bearing motor to prolong the life of the motor



Model	Exhaust Power	IP Rating	Air Delivery	Power	Noise	Duct	Cut Out Size	Switch
FAN5883	20w	IPX4	85m³H	0.87 (W/l/s)	41dB(A)	100mm	Ø112mm	Standard
FAN5890	20w	IPX4	130m³H	0.56 (W/l/s)	41dB(A)	125mm	Ø140mm	Standard
FAN5896	20w	IPX4	364m³H	0.20 (W/l/s)	40dB(A)	150mm	Ø160mm	Standard



THROUGH WALL FAN KITS

100 - 150mm STANDARD AXIAL THROUGH WALL FAN KITS

- Standard series operated from remote switch (not included)
- The unique low profile design enables these fans to be installed unobtrusively into any wall (minimum wall cavity of 100mm)
- Upgraded with ball bearing motors to prolong the life of the motor
- Includes expandable semi rigid duct and weatherproof cowl



Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Cut Out Size	Switch
FAN0053	20w	85m ³ H	0.87 (W/l/s)	41dB(A)	100mm	Ø110mm	Standard
FAN0080	20w	130m ³ H	0.56 (W/l/s)	41dB(A)	125mm	Ø135mm	Standard
FAN0135	20w	313m ³ H	0.19 (W/l/s)	40dB(A)	150mm	Ø160mm	Standard

THROUGH WALL FAN KITS

150mm STANDARD THROUGH WALL FAN KIT - AUTO SHUTTER

- Electrically operated louvre shutters open automatically when fan is running - prevents back draughts
- The unique low profile design enables these fans to be installed unobtrusively into any wall (minimum wall cavity of 110mm)
- Upgraded with ball bearing motors to prolong the life of the motor
- Includes expandable semi rigid duct and weatherproof cowl
- Standard / Auto - remote switch (not included) and internal thermo-activation of shutters



**Note: Installed system performance is always influenced by duct length and layout. Electrically operated louvre shutters open automatically when fan is running - prevents back draughts.*

Model	Exhaust Power	Air Delivery	Fascia Size	Power	Noise	Duct	Cut Out Size	Switch
FAN0136	25w	313m ³ H	200 x 200mm	0.29 (W/l/s)	40dB(A)	150mm	Ø160mm	Standard Auto

COMMERCIAL WALL FANS

230 - 300mm STANDARD WALL / CEILING MOUNTED COMMERCIAL FAN

- Upgraded with ball bearing motors to prolong the life of the motor
- Designed for wall or ceiling mounting
- Efficient and easy to install



Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Cut Out Size	Switch
FAN0374	45w	550m ³ H	0.30 (W/l/s)	50dB(A)	230mm	Ø265mm	Standard
FAN2040	82w	1100m ³ H	0.27 (W/l/s)	60dB(A)	300mm	Ø310mm	Standard

COMMERCIAL WALL FAN KITS

230 - 300mm AXIAL MOUNTED COMMERCIAL FAN

- Upgraded with ball bearing motors to prolong the life of the motor
- Designed to be ducted straight through an exterior wall
- Efficient and easy to install
- Includes expandable semi rigid duct and weatherproof cowl



**Note: Installed system performance is always influenced by duct length and layout.*

Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Cut Out Size	Switch
FAN0455	45w	550m ³ H	0.30 (W/l/s)	50dB(A)	230mm	Ø265mm	Standard
FAN2042	82w	1100m ³ H	0.27 (W/l/s)	60dB(A)	300mm	Ø310mm	Standard



WINDOW FANS

150mm AUTO SHUTTER WINDOW FAN - PULL CORD

- Electrically operated louvre shutters open automatically when fan is running - prevents back draughts
- Designed for use in situations where an existing window fan is being replaced or where there is no available external wall space or ceiling space access
- With ball bearing motors to prolong the life of the motor
- Suitable for bathrooms and ensuites

*Note: **Pull cord:** Integral part of fan.

Standard/Auto: Remote switch (not supplied) and internal thermo-activation of shutters.

Standard/Pull Cord: Remote switch (not supplied) and manual operation of shutters by pull cord.



Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Cut Out Size	Switch
FAN0107	25w	313m ³ H	0.29 (W/Vs)	40dB(A)	150mm	Ø165 - 190mm	Pull Cord (with auto shutter)
FAN0148	45w	550m ³ H	0.30 (W/Vs)	50dB(A)	230mm	Ø255 - 270mm	Pull Cord
FAN0481	82w	1100m ³ H	0.27 (W/Vs)	60dB(A)	300mm	Ø310 - 345mm	Pull Cord

COMMERCIAL WINDOW FANS

230 - 300mm STANDARD AUTO SHUTTER WINDOW COMMERCIAL FAN

- Designed for commercial applications such as restaurants, pubs, hotels, cafes and shops
- With ball bearing motors to prolong the life of the motor

*Note: **Pull cord:** Integral part of fan.

Standard/Auto: Remote switch (not supplied) and internal thermo-activation of shutters.

Standard/Pull Cord: Remote switch (not supplied) and manual operation of shutters by pull cord.



Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Switch
FAN0518	45w	670m ³ H	0.24 (W/Vs)	53dB(A)	230mm	Standard/Pull Cord
FAN0519	45w	670m ³ H	0.24 (W/Vs)	53dB(A)	230mm	Standard/Auto
FAN0520	82w	1020m ³ H	0.29 (W/Vs)	60dB(A)	300mm	Standard/Pull Cord
FAN0521	82w	1020m ³ H	0.29 (W/Vs)	60dB(A)	300mm	Standard/Auto



INLINE FAN

150mm CLASSIC EC AXIAL INLINE HYPER FAN

- This high efficiency inline fan is designed to provide high levels of extraction
- With ball bearing motors to prolong the life of the motor



Model	Exhaust Power	Air Delivery	Power	Noise	Duct	Switch
FAN0085	18w	380m ³ H	0.17 (W/s)	38dB(A)	150mm	Standard

INLINE FAN KIT

150mm CLASSIC INLINE HYPER FAN WITH KIT INCLUDED

- This high efficiency inline fan is designed to provide high levels of extraction
- With ball bearing motors to prolong the life of the motor
- Includes: 1.3 lead and 3 pin plug

KIT INCLUDES:

- White round interior grille
- White fixed louvre grille
- Flexible PVC 5m ducting



Model	Exhaust Power	Air Delivery	Power	Noise	Grille	Exterior Grille	Duct	Switch
FAN0101	18w	380m ³ H	0.17 (W/s)	38dB(A)	Round White	Fixed Louvre Grill	150mm	Standard

NEW PRODUCT!



UV-C Sterilisation



Automatic Cutoff



Coarse particulate Filter



Heat Element Switch


THIN DRY

WALL HAND DRYERS

- Superior hand hygiene for minimal washroom space
- Shallow-design at 100mm
- Suitable for behind-mirror applications, and in areas where space is at a premium
- 600w fan input, 400w heater input and 100m/s air speed
- 10 - 12 second dry time
- Stainless steel 304 housing
- Impact rating: IK08
- Available in three finishes to create a stylish and contemporary washroom



Dimensions



A	B	C
174mm	256mm	102mm

*Note: For more Hand Dryer models, please visit: www.ventair.com.au

Model	Colour	Fan Input	Heater Input	Air Speed	Dry Time	Supply	Noise	IP Rating	IK Rating
FAN7418	White	600w	400w	100 m/s	10-12 sec (approx)	220-240V AC	74dB(A)	IP23	IK08
FAN7419	Black	600w	400w	100 m/s	10-12 sec (approx)	220-240V AC	74dB(A)	IP23	IK08
FAN7420	Brushed	600w	400w	100 m/s	10-12 sec (approx)	220-240V AC	74dB(A)	IP23	IK08

MANROSE THROUGH ROOF PRODUCTS

ROOF COWL KIT

150mm THROUGH ROOF COWL KIT

- Through roof air venting kit with flashing and HDPE tube included

Model	Duct Size
DCT0172	150mm



EXHAUST COWL

150mm CENTRIFUGAL EXHAUST COWL

- High quality aluminium cowl construction with fan incorporated for longevity of operation



Model	Duct Size	Fan Type	Max Fan Watts (W)	Max Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound	Switching
					(l/s)	(m ³ /hr)			
FAN0529	150mm	Centrifugal	70	320	153	550	0.46	62 dB(A)	Standard

EXHAUST COWL KIT

150mm CENTRIFUGAL AXIAL / EXHAUST COWL

- Centrifugal exhaust cowl kit with flashing and HDPE tube included



Model	Duct Size	Fan Type	Max Fan Watts (W)	Max Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound	Switching
					(l/s)	(m ³ /hr)			
FAN0530	150mm	Centrifugal	70	320	153	550	0.46	62 dB(A)	Standard
FAN0532	150mm	Axial	18	91	105	380	0.17	38 dB(A)	Standard

EXHAUST FAN & KITS

150mm CENTRIFUGAL EXHAUST COWL KIT

- Centrifugal exhaust cowl kit with flashing, HDPE tube, duct and intake vent included



Model	Duct Size	Fan Type	Max Fan Watts (W)	Max Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound	Switching
					(l/s)	(m ³ /hr)			
FAN0535	150mm	Centrifugal	70	320	153	550	0.46	62 dB(A)	Standard

MANROSE® ACCESSORIES

ALUMINIUM DUCT

ALUMINIUM FLEXIBLE DUCT


Size	Model No
100mm x 3m	DCT0328
125mm x 3m	DCT0329
150mm x 3m	DCT0330
100mm x 6m	DCT0409
125mm x 6m	DCT0410
150mm x 6m	DCT0411



SEMI-RIGID DUCT

SEMI-RIGID ALUMINIUM DUCT

Size	Model No
125mm x 3m (Exp. 1m - 3m)	DCT0115
200mm x 3m (Exp. 1m - 3m)	DCT0117



PVC DUCT

PVC FLEXIBLE DUCT

Size	Model No
100mm x 3m	DCT0336
125mm x 4m	DCT0337
150mm x 5m	DCT0338



DUCT JOINER

DUCT JOINER - PVC AND METAL

Size	Model No
100mm Duct Joiner - PVC	DCT0159
150mm Duct Joiner - Metal Short	DCT0059



FITTINGS

PVC FITTINGS & DRAUGHT STOPPERS

PVC Reducer	Model No
125 - 100 Duct PVC Reducer	DCT2067
150 - 125 Duct PVC Reducer	DCT2066
150 - 100 Duct PVC Reducer	DCT2122



Y Branch	Model No
100mm PVC Y Branch	DCT2182
150mm PVC Y Branch	DCT2184




Back Draught Stopper	Model No
125mm Inline Back Draught Shutter Bagged	DCT0036



ALUMINIUM DUCT

INSECT MESH, GRILLES, SUIT FIXED LOUVRE, GRAVITY SHUTTER & EGG CRATE

Size	Model No
100mm	DCT0371
125mm	DCT0208
150mm	DCT0207



RUN ON TIMER

FIXED 7-MINS RUN ON EXHAUST FAN TIMER

Size	Model No
Fixed 7 Min Run on Exhaust Fan Timer	V7MINFT



EGGCRATE GRILLES

WALL OR CEILING EGGCRATE GRILLES

Size and Colour	Model No
100mm - White	DCT0375
125mm - White	DCT0472
150mm - White	DCT0473



DIFFUSER

CEILING CIRCULAR ECO VENT/DIFFUSER

Size	Model No
100mm - White	DCT0020
125mm - White	DCT0174
150mm - White	DCT0058



DESIGNER FASCIA VENT

DESIGNER WALL/CEILING SQUARE VENT

Size and Colour	Model No
150mm - White	DCT2236



WEATHERPROOF COWL

WEATHERPROOF COWLS WITH DRAFT SHUTTER

Size and Colour	Model No
100mm - White	V100WPC
125mm - White	V125WPC
150mm - White	V150WPC
100mm - Black	V100WPCBL
125mm - Black	V125WPCBL
150mm - Black	V150WPCBL



ROUND FIXED LOUVRE GRILLES

STANDARD ROUND FIXED LOUVRE GRILLE

Size and Colour	Model No
100mm - White	V100RDG
125mm - White	V125RDG
150mm - White	V150RDG
100mm - Black	V100RDGBL
125mm - Black	V125RDGBL
150mm - Black	V150RDGBL



SQUARE FIXED LOUVRE GRILLES

STANDARD SQUARE FIXED LOUVRE GRILLE

Size and Colour	Model No
100mm - White	V100FL
125mm - White	V125FL
150mm - White	V150FL
100mm - Black	V100FLBL
125mm - Black	V125FLBL
150mm - Black	V150FLBL



GRAVITY SHUTTER GRILLES

GRAVITY SHUTTER

Size and Colour	Model No
100mm - White	V100GL
125mm - White	V125GL
150mm - White	V150GL
100mm - Black	V100GL-BL
125mm - Black	V125GL-BL
150mm - Black	V150GL-BL



For a full list of Ventilation accessories please visit: www.ventair.com.au



FLEXIBLE 3 ZERO ALUMINIUM DUCTING

Model	Size
VAD100	ø100mm x 3m
VAD100-6	ø100mm x 6m
VAD125	ø125mm x 4m
VAD125-6	ø125mm x 6m
VAD150	ø150mm x 6m
VAD150-3	ø150mm x 3m
VAD200-3	ø200mm x 3m
VAD200-6	ø200mm x 6m



SEMI RIGID DUCTING

Model	Size
VSRD100	ø100mm x 3m (expanded size)
VSRD125	ø125mm x 3m (expanded size)
VSRD150	ø150mm x 3m (expanded size)



DUCTING KITS

Model	Duct Size	Fixed Grille
V100DKIT	ø100mm x 3m	V100FG
V150DKIT	ø150mm x 6m	V150FG



ADAPTERS, REDUCERS & CONNECTORS

Model	Size
VDA100-150	100mm-150mm
V150Y	150mm Y Adaptor

For more on our extensive range please visit: www.ventair.com.au



DIGITAL TOUCH SCREEN THERMOSTAT

Model	Operation Temperature
FAN7194	0°C - 40°C



RUN ON TIMER

COMPATIBLE WITH VENTAIR
AC EXHAUST FAN RANGE

Model	Timer
VTROTIMER	1-25 mins



ULTECON THERMOSTAT

MECHANICAL THERMOSTAT CONTROLLER

Model	Operation Temperature
FAN5856	10°C - 30°C



RUN ON MOTION SENSOR

Model	Timer
VTMSENSOR	1-20 Minute Run On Timer with 1-5 metre motion sensor



FIXED LOUVRE VENT

Model	Spigot Size
V100FG	ø100mm
V125FG	ø125mm
V150FG	ø150mm
V200FG	ø200mm



GRAVITY SHUTTER VENT

Model	Spigot Size
V100GS	ø100mm
V125GS	ø125mm
V150GS	ø150mm



ADJUSTABLE CONE DIFFUSER

Model	Duct Size
V100WRIG	ø100mm
V125WRIG	ø125mm
V150WRIG	ø150mm
V200WRIG	ø200mm



JET DIFFUSER

Model	Duct Size
V150JD	ø150mm




STAINLESS STEEL HOODED VENT

Model	Duct Size
V150SHEG	ø150mm



POWDER COATED WEATHERPROOF VENT


Model	Duct Size
V150WL	ø150mm
V200WL	ø200mm

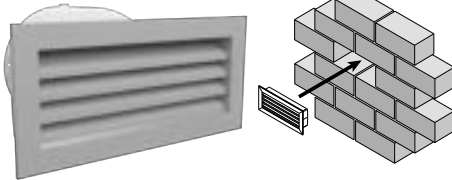

PREMIUM VENT

WEATHER PROOF ALUMINIUM EXTERIOR
AIR VENT

Model	Size
V150PALG	155 x 280mm (Fits Standard Brick Size), Ø150mm Duct outlet size

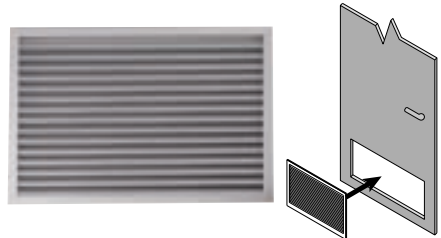

DOOR GRILLE

DOOR RELIEF AIR GRILLE

Model	Size
VDRAG	440 x 140mm



BATHROOM REMOTE CONTROL

SUITS VENTAIR BATHROOM UNITS



BATHROOM REMOTE CONTROL

UNIVERSAL BATHROOM FAN AND HEATER REMOTE

Model	To Suit
V31RFR	Ventair 3-in-1 units (Ex. 4-in-1 3-in-1 & 2-in-1 Fan Heater Bathroom units)

Model	To Suit
VUBHR	All Ventair 4-in-1, 3-in-1 & 2-in-1 Bathroom Units



REPLACEMENT GLOBES

Model	Wattage	Type	Light Colour	Models to suit
VR63LED	6 watts	LED	Natural Light	Klein 2
VR63LEDWW	6 watts	LED	Warm Light	Klein 2
VR80LED	6 watts	LED	Natural Light	Klein 4 & Steampro
7WGU10LED	7 watts	LED	4000K Natural	



REPLACEMENT LED LIGHTS

10W REPLACEMENT LED PARTS

Model	Style	Colour	Lumens
BDL10	10w Replacement Brook LED	4000K Natural	~700lm
MDL10-NEW	10w Replacement Myka LED	4000K Natural	~600lm



275W HEAT GLOBE

Model	Wattage	Models to suit
VHL275	275 watts	Most traditional Bathroom Units



HEAT TUBE

SUITS AIRBUS 3-IN-1 BATHROOM HEATERS

Model	Wattage	Colour
PVP600HL	600 watts	White



MANROSE[®]


HEAT TRANSFER

WARMING UP TO THE TASK


Heat Transfer is designed to transfer excess heat from a heat source room, such as a lounge, to other rooms in the home.

If the lounge is warm and comfortable but the rest of the house remains cold, then this is the system needed to efficiently use that warmth to reduce the chill in bedrooms, creating a drier, more comfortable environment throughout the home.

Heat Transfer includes R0.6 acoustic insulated ducting as standard to maximise heat retention with minimal air transfer noise.

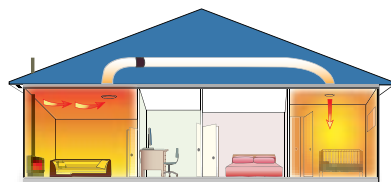

ROOM 1

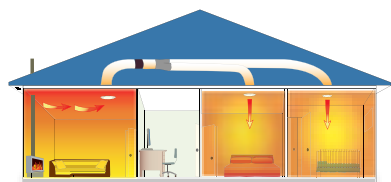

ROOM 2

Model	Name
MRHT1	Heat Transfer 1 Room
MRHT2	Heat Transfer 2 Room

Transfer excess heat to other rooms in the home



4 Capital Place, Carrum Downs, VIC, 3201, Australia
 T: +61 3 9775 0556 | F: +61 3 9775 0775 | E: info@ventair.com.au
www.ventair.com.au | [f](#) [@](#) [in](#) [p](#)

